

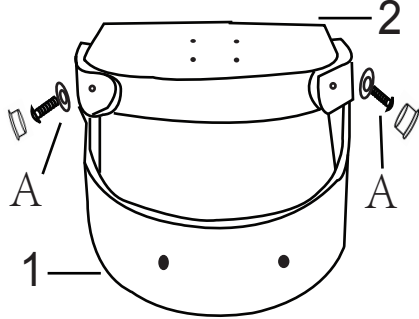
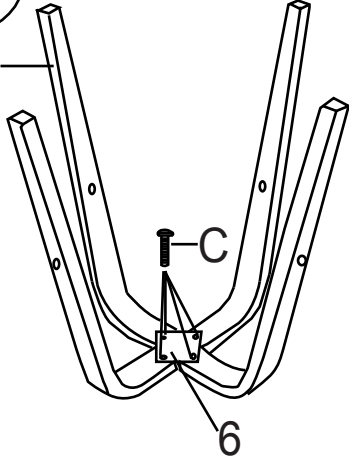
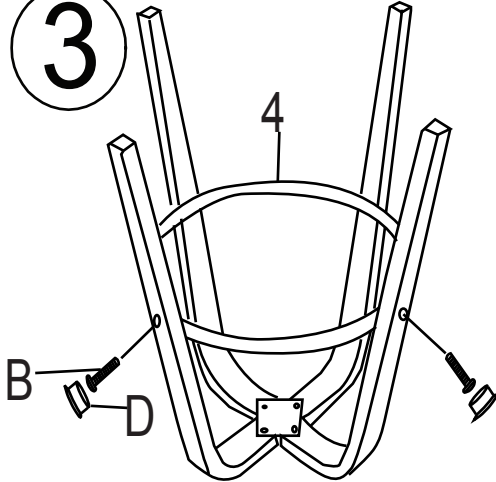






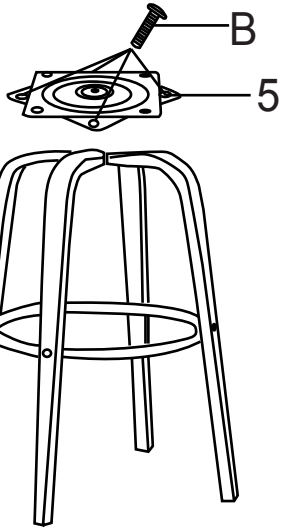
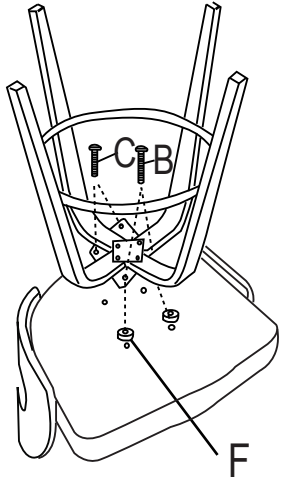
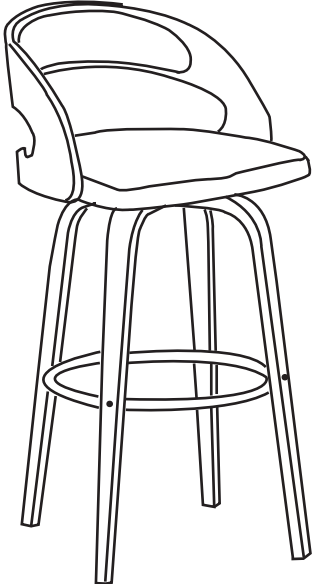





<p>1*1</p> 	<p>A*4+1EXT</p>  <p>M6*30MM</p>	<p>1</p>  <p>1. Use the screws A to fix the back 1 and seat 2 2. Insert the plastic caps(D) into the holes in the back</p>	<p>2</p>  <p>3. Use the screws C to fix the legs 3 by the metal plate 6 DO NOT TIGHTEN THE SCREWS(C)</p>	<p>3</p>  <p>4. Use the screws(B) to fix the chromed ring (4) to the assembled feet. 5. TIGHTEN ALL THE SCREWS, BOTH (B) AND (C) 6. Insert the plastic caps(D) into the holes in the legs(3)</p>
<p>2*1</p> 	<p>B*10+1EXT</p>  <p>M6*25MM</p>			
<p>3*4</p> 	<p>C*6+1EXT</p>  <p>M6*20MM</p>			
<p>4*1</p> 	<p>D*8</p> 	<p>4</p>  <p>7. Tighten the swivel part (5) by screws(B)</p>	<p>5</p>  <p>8. Fix the legs to the seat, by 2 pcs short screws C in the rear side, and 2 pcs long screws B in the front side. DO NOT FORGET TO ADD 2 PCS RUBBER WASHER BETWEEN THE SEAT AND THE SWIVEL PARTS</p>	<p>6</p> 
<p>5*1</p> 	<p>F*2</p> 			
<p>6*1</p> 	<p>G*1</p> 